

# DC Motor TW-260 Series

OUTPUT POWER: 0.3 - 20.0W (APPROX)




## Typical Application:

1. Massager / Vibrator.
2. Radio Control Model.

**Weight:** 28g (Approx.)

METAL BRUSH AND CARBON BRUSH MOTORS, FLAT TYPES AND ROUND TYPES ARE ALL AVAILABLE.

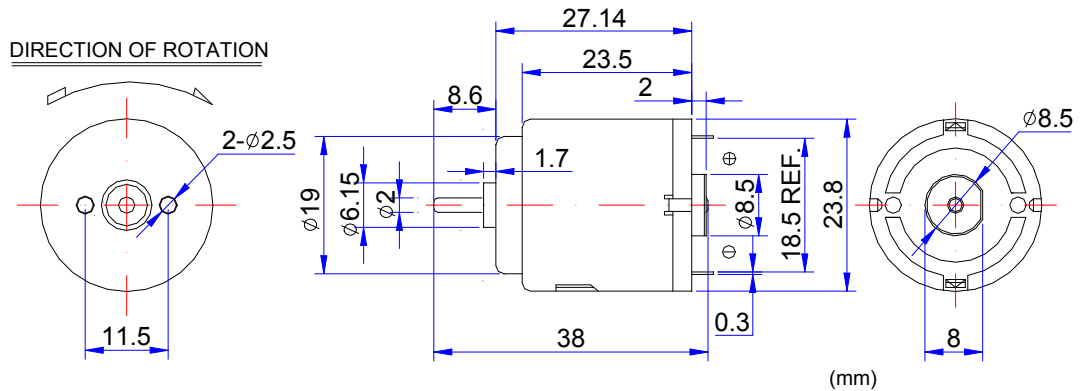

## ELECTRICAL SPECIFICATION CHART: (The following specifications can be changed as customers' requirement)

Model	Voltage		At No Load		At Max Efficiency					Stall Torque G.CM
	Workable Range		Nominal	Speed	Current	Speed	Current	Torque	Output	
			RPM	A	RRPM	A	G.CM	W	%	
TW-260-20100	1.5~12.0	3.0V CONSTANT	9,600	0.13	7,600	0.50	12.00	0.93	62.3	57
TW-260-18130	4.5~6.0	4.5V CONSTANT	9,800	0.14	7,700	0.53	15.00	1.18	49.6	72
		6.0V CONSTANT	13,600	0.16	10,900	0.64	16.00	1.79	46.6	86
TW-260-2670	1.5~12.0	4.5V CONSTANT	18,300	0.30	15,100	1.43	21.00	3.25	50.5	125
		3.0V CONSTANT	14,000	0.25	11,400	0.88	15.80	1.83	66.0	85
TW-260S-2295	3.0~6.0	4.8V CONSTANT	10,800	0.17	8,900	0.85	24.00	2.19	53.7	145
		6.0V CONSTANT	13,500	0.18	11,300	0.97	28.00	3.25	55.8	181
TW-260S-2670	3.0~4.5	4.5V CONSTANT	13,800	0.25	11,700	1.10	25.00	3.00	80.6	170

## CHARACTERISTIC CURVES:

