

齿轮减速电机 DC GEAR MOTOR

典型应用 Typical Applications


- ※感应水龙头 Induction stopcock
- ※保险柜 Strongbox
- ※自动阀门 Automatic valve

齿轮箱长度L Length of Gear	减速比 Ratio			
19	15	20		
21	26	34	45	
23	57	75	98	
25	125	165	217	
27	275	362	478	
29	603	796	1051	




型号 MODEL	电压 VOLTAGE	空载 NO LOAD		负载 AT MAXIMUM EFFICIENCY				堵转STALL			
		转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	转矩 TORQUE	功率 OUTPUT	转矩 TORQUE	电流 CURRENT		
	V	r/min	A	r/min	A	mN·m	Kg·cm	W	mN·m	Kg·cm	A
25A310-217	6	30	0.04	24	0.10	117.6	1.2	0.30	588	6.0	0.48
25A310-362	4.5	9	0.02	7	0.12	88.2	0.9	0.06	392	4.0	0.20

齿轮减速电机

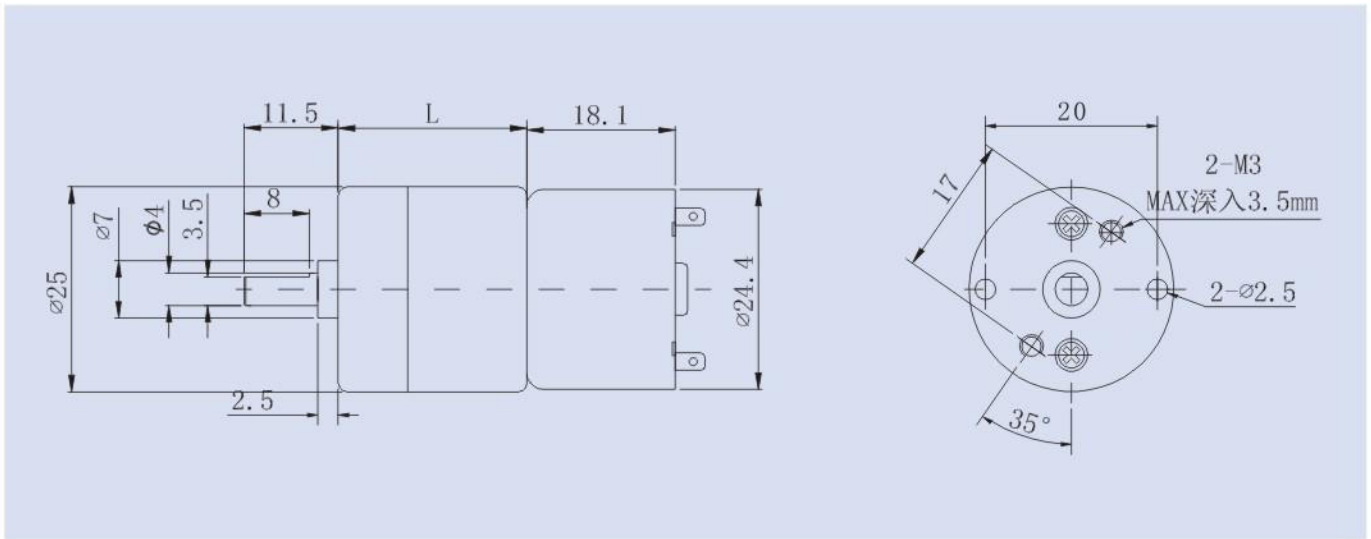

310TA-11400 2.5V

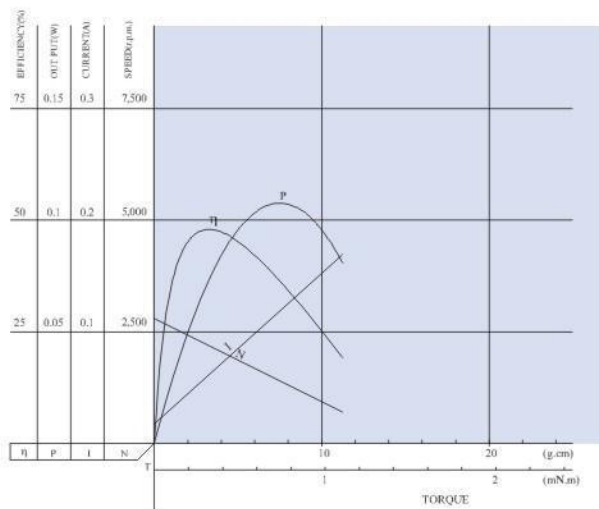

25A310-217-0630

