


Rohs Compliance


REV	DESCRIPTION	DATE	BY
A	FIRST ISSUE		

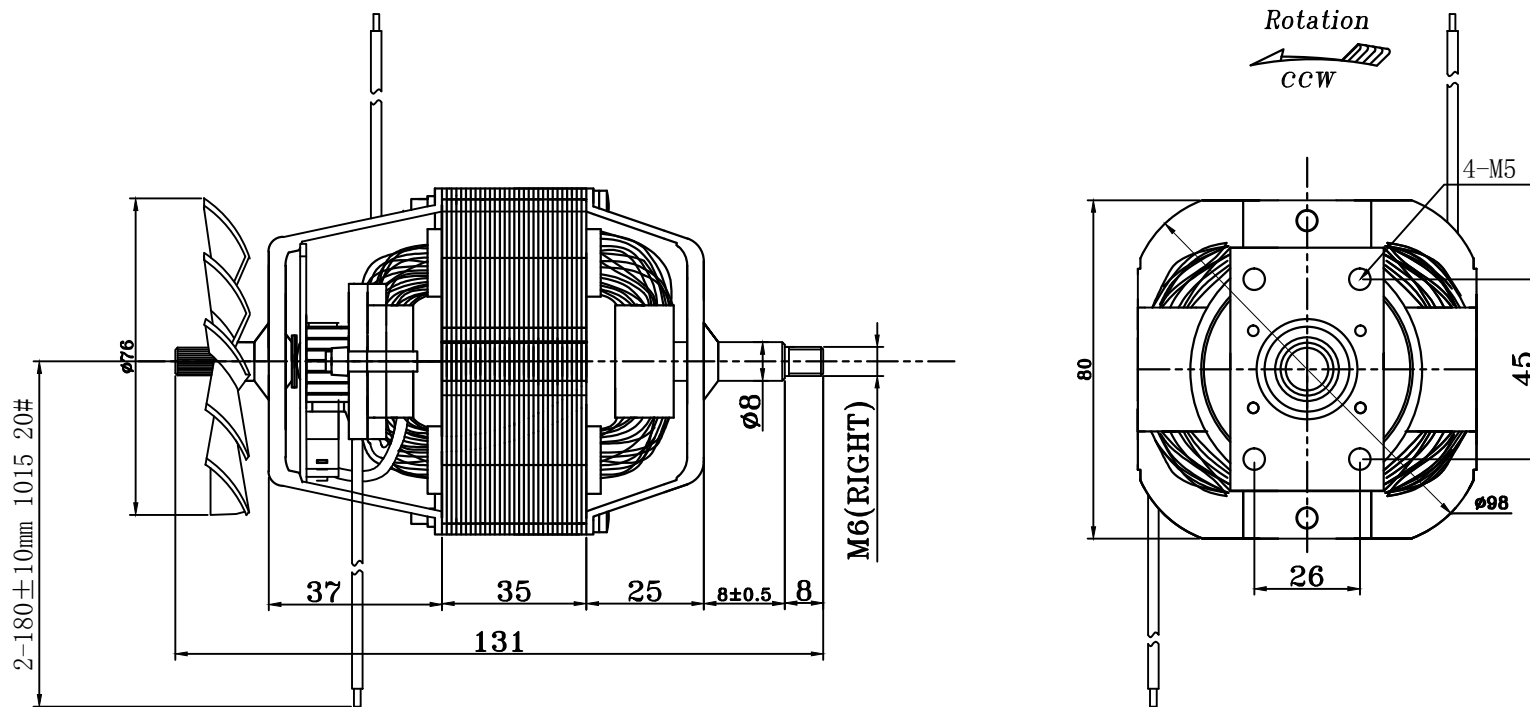

Notes:

- Voltage with Frequency (电压和频率): 220V/60Hz
- Rotation (转向): CCW
- No-load Performance (空载性能)
 No-load Speed (空载转速): 14500RPM±15%
 No-load Current (空载电流): 1.5A±15%
 No-load Power (空载功率): 330W±15%
- On load Performance (负载性能)
 On load Speed (负载转速): 9000RPM±10%
 On load Current (负载电流): 3.0A±10%
 On load Power (负载功率): 650W±10%
- Thermostat (温控): 120° C
- Temperture Rise (温升): 115°
- Insulation Grade (绝缘等级): ClassF
- Withstand Voltage (耐压): 1800V/1mA/1S

CIRCUIT DIAGRAM:

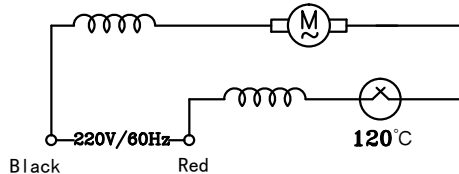

Label content:

OD-9835M220
220V/60Hz
MADE IN CHINA

GENERAL TOLERANCES ISO 2768-m	
Permissible deviations for linear dimensions	
Permissible deviations for basic size range	
>0.5	>3
...3	...30
m	±0.1
Permissible deviations for angular dimensions	
Permissible deviations for ranges of lengths in millimeters of the shorter side of the angle concerned	
>10	>50
...10	...50
m	±1°

DWN. BY ADWRAD	CHK. BY	APP. BY
Date(yyymmdd) 2016-11-14	Date(yyymmdd)	Date(yyymmdd)
MATERIAL:		<input checked="" type="checkbox"/> SCALE 3:1 <input type="checkbox"/> NOT SCALE
FINISH:		
General Tolerance ISO 2768-1 Class m (Unless specified)		TITLE
ALL DIMENSIONS ARE IN MILLIMETRES		OD-9835M22
SHENZHEN ODIN IMPORT AND EXPORT CO., LTD		DWG NO. 9835M22
		SHEET 1 OF 1