

齿轮减速电机 DC GEAR MOTOR

典型应用 Typical Applications


- ※液晶显示屏 Liquid crystal display screen
- ※自动门锁 Automatic door-lock
- ※电动窗帘 Electric curtain

减速比 Ratio	46	116	292
L	20	22.3	24.6


齿轮减速电机



型号 MODEL	电压 VOLTAGE	空载 NO LOAD		负载 AT MAXIMUM EFFICIENCY				堵转STALL			
		转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	转矩 TORQUE		功率 OUTPUT	转矩 TORQUE		电流 CURRENT
	v	r/min	A	r/min	A	mN·m	Kg·cm	W	mN·m	Kg·cm	A
33B360-19	12	225	0.07	166	0.14	39.2	0.4	0.68	149.0	1.52	0.40
33B360-46	24	137	0.06	109	0.20	176.4	1.8	2.01	862.7	8.8	0.80

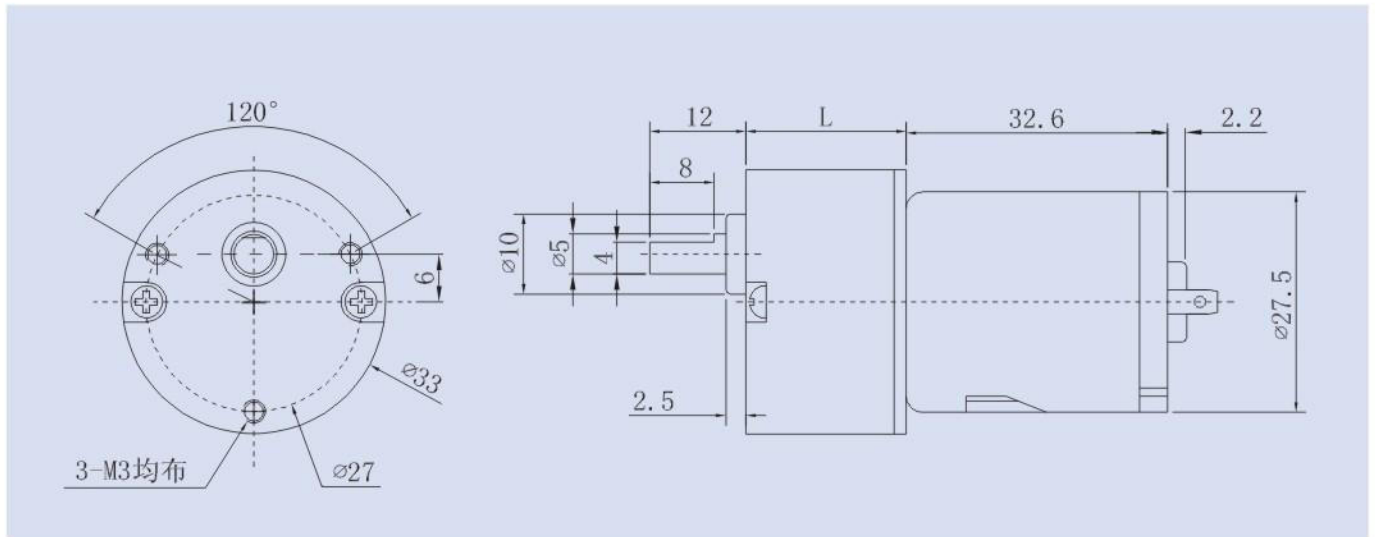

360SH-10500 DC12.0V

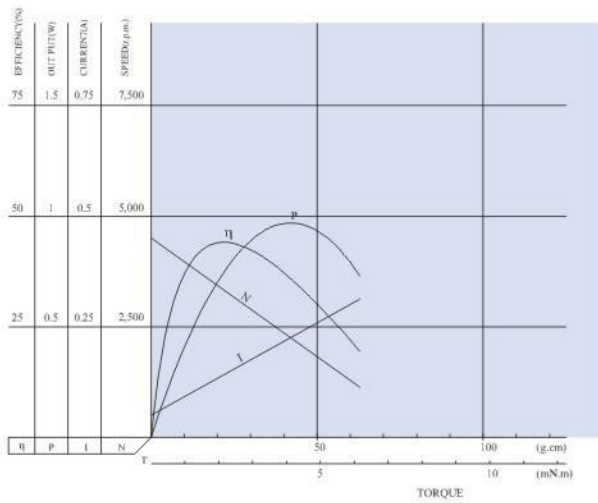

33B360-20-12225

